


Nomyu Inlite

Touch...the sky!





Made in Europe

Multimedia Kiosks and Digital Mupis are developed and produced in Portugal.

The success of our company in the international market shows us that we have developed and produce excellent products and we should therefore be proud and confident in the future.

Advertising and Interactivity

The version of NOMYU INLITE was developed in order to get a similar design to Nomyu through a simple and economic method of manufacture.

This model can be manufactured in stainless steel (AISI 304/316) or painted steel (available in all RAL colours) using steel plate of 1,5mm to 2,5mm which ensures the stability and rigidity of the all structure.

This Kiosk is designed especially for multimedia advertising purposes and support large displays (17" to 103"). The two sides of the kiosk are designed so that there is a great versatility.

The area where the PC will be installed has security locks, general switch and is easily detachable, leaving enough space for the installation and access to a minitower PC.

On the side of the monitor are two speakers and the kiosk has 2 independent systems of ventilation, one for the monitor and other for the PC.

NOMYU INLITE can be equipped with computers with different "performances" (CPU) with hard drives from 100 to 320 GB, 4 Gb Ram Memory, 128mb graphics card expandable to 512, 10/100 mb ethernet, and Windows 7 or 8. This kiosk can also be equipped with computers with other OS like Linux, etc.



Nomyu Inlite

Dynamic Advertising

Incredibly
Modern



Available in any RAL color



EXHIBITION AND INTERACTIVITY

NOMYU INLITE is an excellent platform for the dissemination of multimedia content (advertising, institutional information, entertainment, etc..), and can be used as information point or digital signage purposes.

With interactive integration provides a new way of use, such as access to multimedia content or a more creative and playful interactive applications.

▮ The dimensions and specifications are given in graphical representation and may not correspond to the reality of the equipment. The dimensions shown are approximate and represent the equipment for ascertain size display. The final dimension may vary depending display model and other components used. The client must request technical drawing for final validation (measures and specifications).

Nomyu Inlite

Dynamic Advertising

Dimensions Kiosk



H 2100 W 800

D 180 mm
(for display 48")



Weight 95 kg
(for display 48")



INCREDIBLE BRIGHTNESS, HIGH CONTRAST

NOMYU INLITE can use high brightness displays to produce a sunlight readable image which may easily be seen in outdoor applications or in bright indoor environments.

Different external lighting conditions require different brightness levels.

An internal light sensor (optional) measures the ambient light in the area and automatically adjusts the image accordingly.

▮ The dimensions and specifications are given in graphical representation and may not correspond to the reality of the equipment. The dimensions shown are approximate and represent the equipment for a certain size display. The final dimension may vary depending on the display model and other components used. The client must request technical drawings for final validation (measures and specifications).

Nomyu Inlite

Dynamic Advertising

High Reliability and Faultless Design

The version of NOMYU INLITE was developed in order to get a similar design to NOMYU through a simple and economic method of manufacture.



Glass design with curved lines


Available for:
Touch ProCap technology
Digital Advertising



Glass design with straight lines

Available for:
Touch Infrared or Procap
technology
Digital Advertising

▮ The dimensions and specifications are given in graphical representation and may not correspond to the reality of the equipment. The dimensions shown are approximate and represent the equipment for ascertain size display. The final dimension may vary depending display model and other components used. The client must request technical drawing for final validation (measures and specifications).

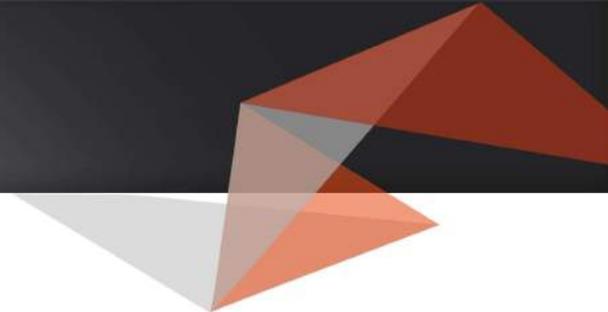

Interactive Technology

Touch the Sky

NOMYU INLITE was developed to allow integration of any type of touchscreen technology, thus creating an interactive device for indoor or outdoor.

OEMKIOSKS unique experience in the field of interactive technologies, Allows Them to be integrated in NOMYU INLITE effectively and professionally.

In outdoor kiosks, Procap technology may be integrated into NOMYU INLITE, Thus Allowing the touch to be Performed on glass surface, giving NOMYU INLITE extreme security against vandalism.



Precision



Response



Touches




Multitouch

Widest touch technologies can be used, each optimized for different operating characteristics and environments to suit application requirements of customers, like Surface Acoustic Wave (SAW), Capacitive, Infrared, Optical Imaging and Projected Capacitive (ProCap), etc.

NOMYU INLITE interactive is available from 17" to 108", from single touch to 40 independent touches, and with finger, gloved hand & pointer inputs..




Technical Specifications

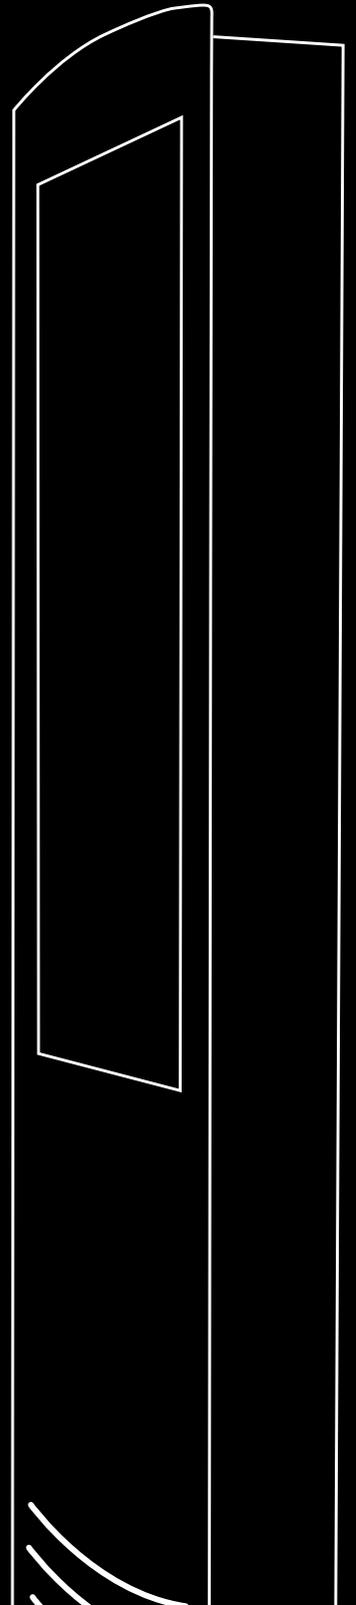

Nomyu Inlite

Distance Comparison and Main Features

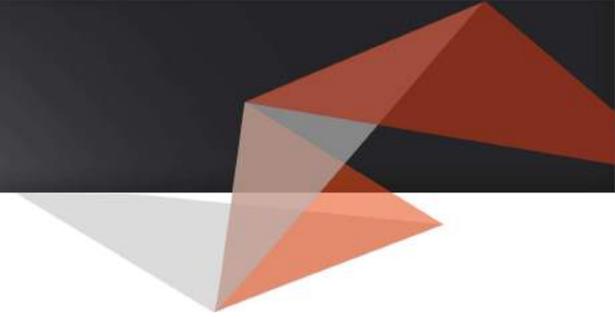

Model 48"



General Characteristics

Type



Indoor



outdoor

Materials



Painted Steel



Stainless Steel (AISI 304/316)

Options



22" to 103" Displays



Software Ykiosk



Glass Protection


(Other options available upon request)

▮ The dimensions and specifications are given in graphical representation and may not correspond to the reality of the equipment. The dimensions shown are approximate and represent the equipment for a certain size display. The final dimension may vary depending on the display model and other components used. The client must request a technical drawing for final validation (measures and specifications).

Nomyu Inlite

Kiosk Measurements

Technical Drawing

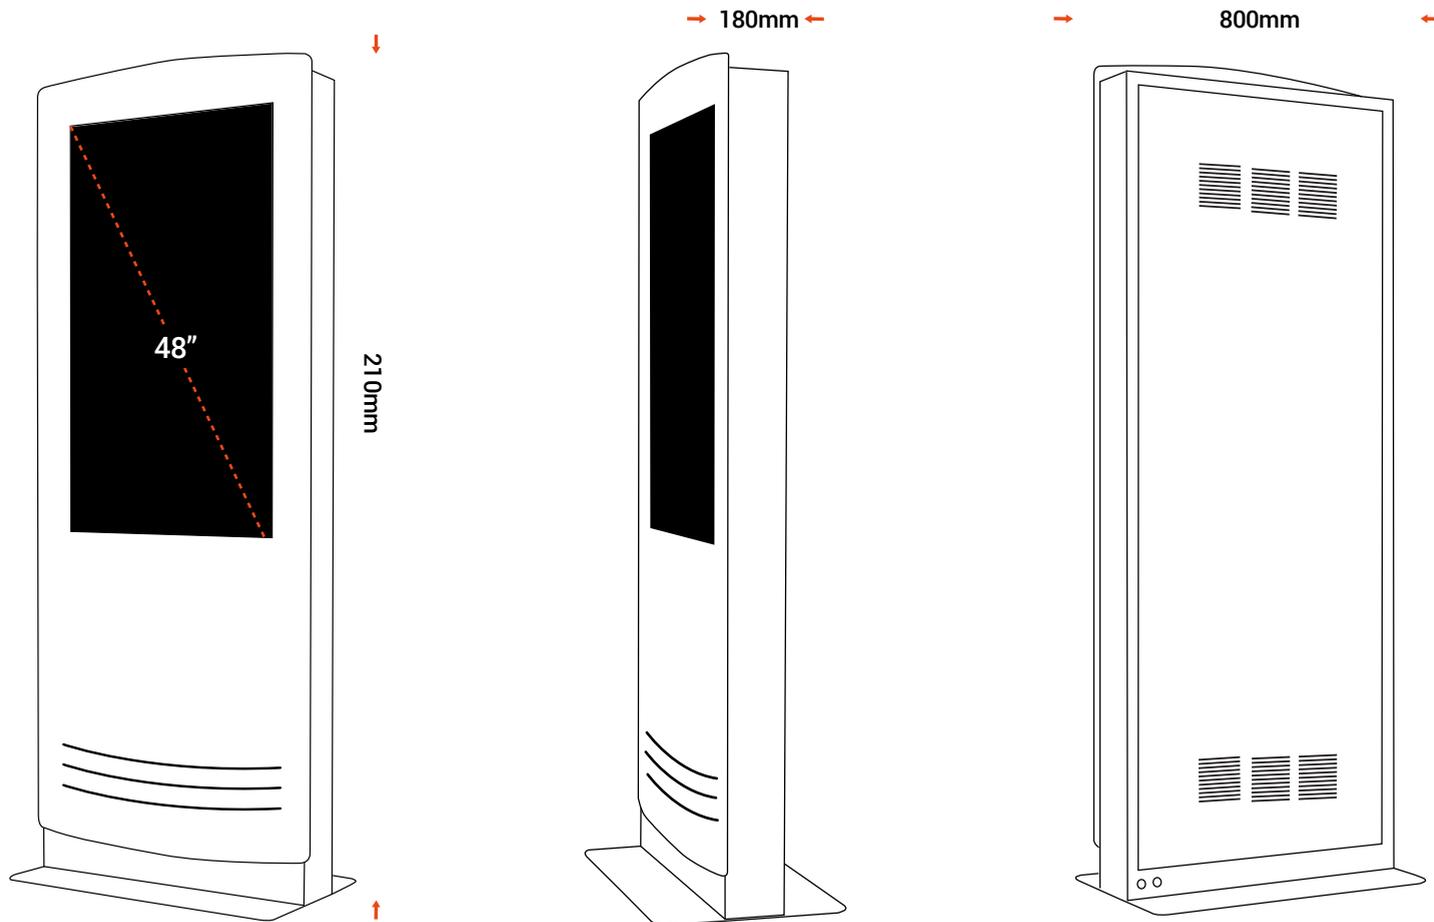

▮ The dimensions and specifications are given in graphical representation and may not correspond to the reality of the equipment. The dimensions shown are approximate and represent the equipment for a certain size display. The final dimension may vary depending on the display model and other components used. The client must request a technical drawing for final validation (measures and specifications).

Nomyu Inlite

Technical data

Configuration



H 2100 W 800 D 180mm
(for 48" display)



Display 48"
(resolution 1920 x 1080)



95kg
(for 48" display)



Steel plate of 1,5mm/2mm



Integrated speakers



Stainless steel AISI304/316 or
painted steel (RAL Colors)

OPTIONAL



32" to 108" Displays



Touch screen
(SAW, Infrared, ProCap)



integrating two displays
(1 on each side)



Atom, Dual Core, Core i3 or i5 PC computer



Wireless - WLAN



Available in any RAL color



Windows 7 or 8, Linux, Mac *



Bluetooth



Ykiosk software (secure shell & browser)



Webcam

Other components can be integrated changing kiosk dimensions: ticket printer, coin validator, bill validator, card readers, antivandalic keyboard, proximity sensor, etc.

* depending on type of touch technology used

This document is provided only for information purposes. The presented information is subject to change without prior notice, given the constant evolution of content.
THE PARTTEAM GROUP is not responsible for any errors or omissions in this document, based on the information it contains, as a result of its publication.

Multimedia **kiosks**

Touch... the sky



oemKIOSKS | Partteam Group Portugal | Rua Nova da Nespereira, Pavilhão 10 | 4770 -287 Lagoa - Vila Nova de Famalicão
tel: +351 252 378 589 | +351 252 327 185 | fax: + 351 252 378 591 | Portugal
www.oemkiosks.com | oem@oemkiosks.com